



Domus Windows and Doors Products

Advantages

Warranty-

- 20 years warranty on window frames.
- 5 years warranty on hardware (operation parts)

Durability-

- No painting needed
- No maintenance
- Frames are fusion welded at the corners that will never leak or come apart
- All exposed hardware made of high-grade stainless

Personal Features-

- Lead free and health safe
- Energy saving, excellent thermal performance
- Substantial sound reduction
- A level of hurricane protection

Attractive appearance-

- Options for Plain or French designs
- Variety of glass shades (grey, bronze, blue green, clear etc)

Wide variety of window operations-

- Awning- (Top Hung or Projector)
- Casement- (Side hung)
- Sash- (Single hung)
- Sliders
- Custom – (Includes special shapes, sizes and designs)

Security Options-

- Laminated Security Glass (Security without the need for Burglar Bars)
- Stainless steel locking system
- Reinforced frames with internal steel

Note: UPVC (Unplasticized Polyvinyl Chloride) Not plastic.



Domus Windows and Doors

Types and details

Performance Windows

- Narrow 2 1/4" frame. Frame can only take size glass up to 7.5mm Laminate.
- All performance windows come standard with security opening limiters. (which prevents a thief from opening the windows)
- Many different glazing options including glass sizes (3 & 5mm), types (clear, grey, bronze or frosted)
- Security Laminate - 7.5" glass "sandwich" comprised of 1.0 mm interlayer between two 3.2 mm glass sheets.

Supreme Windows and Doors

- Wider 3 1/4" frame that can take single pane or 7.5mm laminate glass.
- Casement & Awning windows are (wind out powder coated stainless steel) operators.
- Includes Patio Doors. Features:
 - Stainless Steel Door Rollers
 - Self-draining door tracks
 - Standard 7.5" glass "sandwich" comprised of 1.0 mm interlayer between two 3.2 mm glass sheets.
 - Stainless steel double beak lock for security
 - Stainless steel lock keeper
 - Interlocking doors for security

Impact Windows and Doors

- Domus Impact Windows and Doors provide the same sophisticated, up market styling as the Supreme line of windows and doors.
- It has the same 3 ¼" window frame.
- Casement & Awning windows are (wind out powder coated stainless steel) operators.
- The Domus Impact windows are manufactured in a different manner to ensure that each window or door type meets or exceeds either or both of ASTM4 and or Miami-Dade5 Impact rating.
- Includes patio doors in 2,3 and 4 panel formats and swing doors (in single and double formats, with or without side windows and with or without top fixed windows
- All Domus Impact Sashes are manufactured with galvanized steel sealed into closed chambers within the sashes (such that moisture cannot reach the steel). Frames are reinforced as necessary with aluminium and or/steel.
- The glass units are glued into the sashes with speciality adhesive / sealers (to prevent the glass unit from being pulled out of the sash by impacting debris)
- Special locks, keepers and other mechanisms ensure the window or door unit can withstand the ASTM defined impact without failure.
- With the exception of the casement windows, awning windows and swing doors, all Supreme products come standard with a security opening limiter (which prevent a thief from opening the window or door and silently entering)
- All units come standard with Domus Impact-Laminate glass. Impact Laminate- 9 mm. Two 3.2 mm glass sandwich with 2.5 mm laminate inter layer.

Additional items

- Insect screens are optional
- Factory painted aluminium burglar bars

Glass options


- Clear- 3mm/5mm
- Frosted- 5mm
- Reeded- 3mm
- Grey- 3mm/5mm
- Bronze- 3mm/5mm
- Blue Green- 6mm
- Reflective- 6mm
- Security Laminate- 7.5mm
- Security Solar-E - 7.5mm
- Impact Laminate- 9mm

Measurements

Measurements can be taken using the following unit options:

- Centimetres
- Feet and Inches (To the nearest fraction)
- Millimetres

See below diagram showing what measurements are needed to be taken on a window masonry opening:

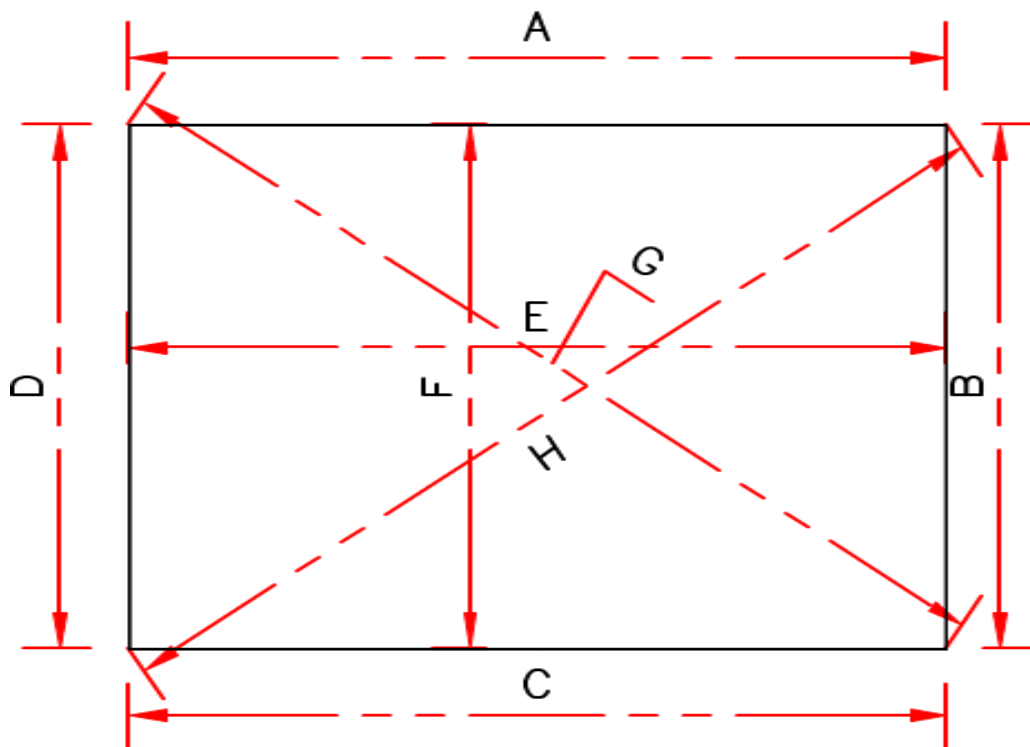

Notes:

- All (8) eight dimensions above are required when measuring a custom window opening.
- Measurements must be taken on the internal edge of masonry opening.

Installation Guidelines


Items provided with purchase-

- 3" (8 gauge) Stainless Steel screw with washer
- ½" plugs for screw holes.

Items required for doing installation-

- 5/16" metal bit
- 5/16" masonry bit (if it is a masonry opening)
- ½" metal bit
- Hammer drill
- 5/16" wall plugs to install screws in masonry openings
- Measuring tape
- Caulking gun and caulking for windows

See diagram below:

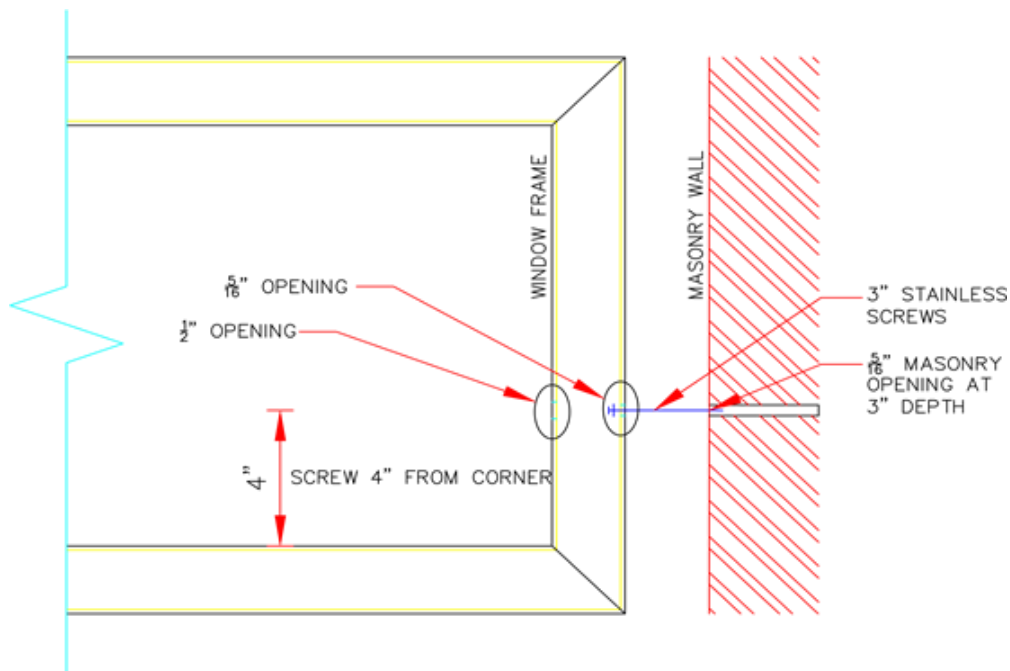

Notes:

- Screws are recommended to be installed 4" away from the internal corners of the window frames.
- Screws are recommended to be installed on all four (4) sides of the window frame